



Electrical Specification

Items	Spec	Unit
Center Frequency [fo]	942.5	MHz
Bandwidth [BW]	$f_o \pm 17.5$ [925.0 ~ 960.0]	MHz
Insertion Loss in BW	2.3	dB max.
Ripple in BW	0.9	dB max.
Return Loss in BW		dB min.
V S W R in BW	2.0	max.
Attenuation <input checked="" type="checkbox"/> Absolute Value <input type="checkbox"/> Relative Value	6.0 dB min. @ $f_o \pm$ [915.0 &]	MHz
	6.0 dB min. @ $f_o \pm$ [970.0 &]	MHz
	dB min. @ $f_o \pm$ [&]	MHz
	dB min. @ $f_o \pm$ [&]	MHz
Group Delay Variation		ns max
Input Power		W max.
In/Out Impedance	50 Ω	
Operation Temp. Range	-40°C to +85°C	

Mechanical Specification

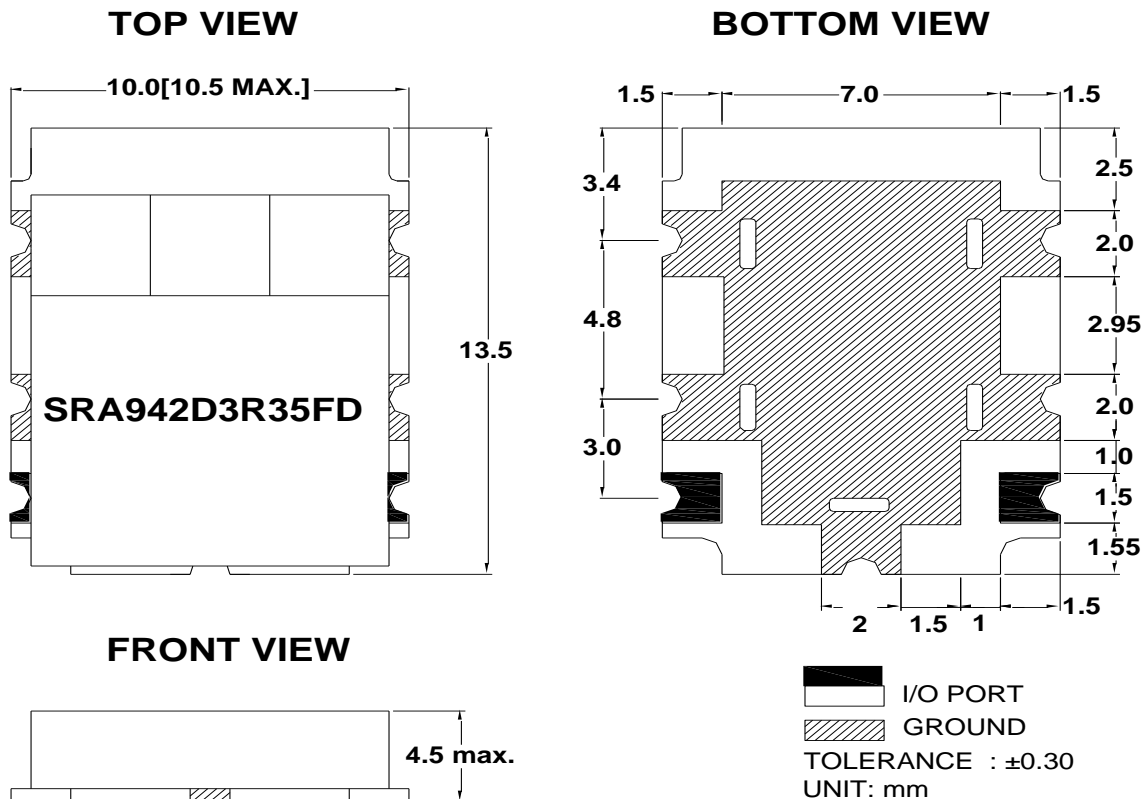

Plot Data

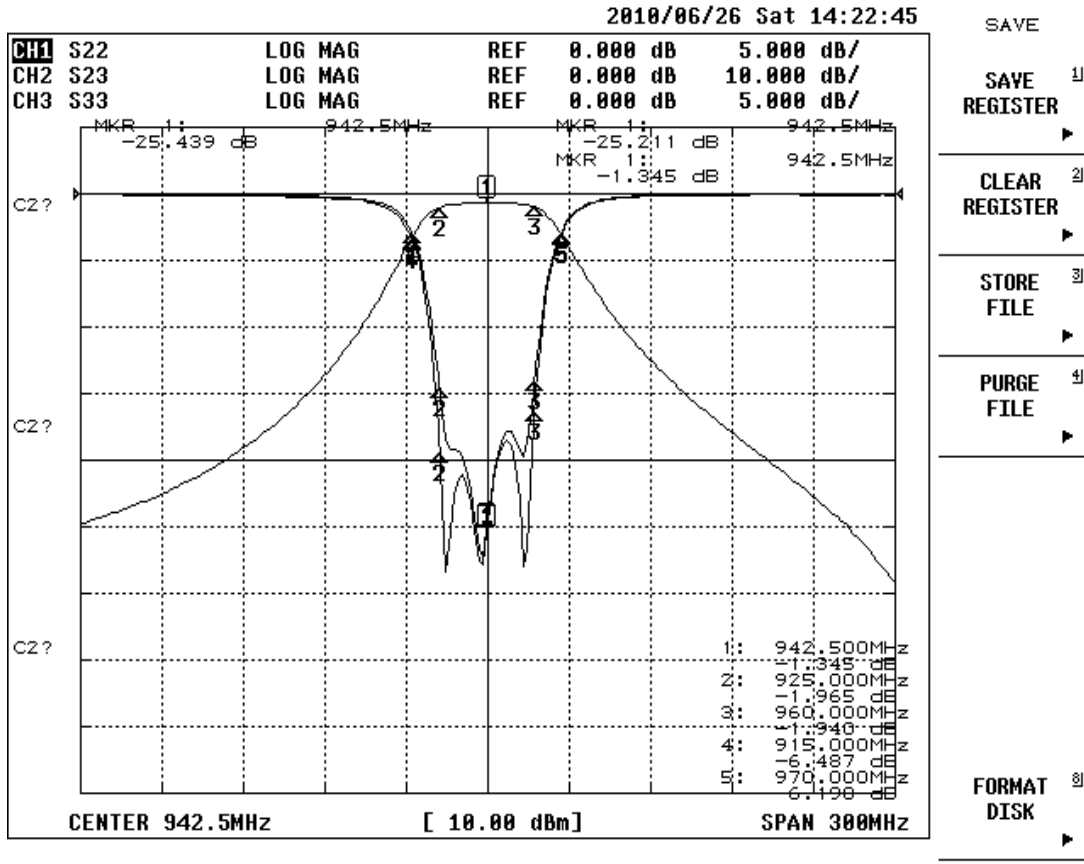

Recommended PC Board Pattern

