



Electrical Specification

Items	Spec	Unit
Center Frequency [fo]	1747.5	MHz
Bandwidth [BW]	$fo \pm 37.5$ [1710.0 ~ 1785.0]	MHz
Insertion Loss in BW	2.5	dB max.
Ripple in BW	1.0	dB max.
Return Loss in BW		dB min.
V S W R in BW	1.5	max.
Attenuation <input checked="" type="checkbox"/> Absolute Value <input type="checkbox"/> Relative Value	2.0 dB min. @ $fo \pm$ [1700.0 & 1795.0]	MHz
	5.0 dB min. @ $fo \pm$ [1690.0 & 1805.0]	MHz
	32.0 dB min. @ $fo \pm$ [1607.5 & 1887.5]	MHz
	dB min. @ $fo \pm$ [&]	MHz
Group Delay Variation		ns max
Input Power		W max.
In/Out Impedance	50 Ω	
Operation Temp. Range	-40°C to +85°C	

Mechanical Specification

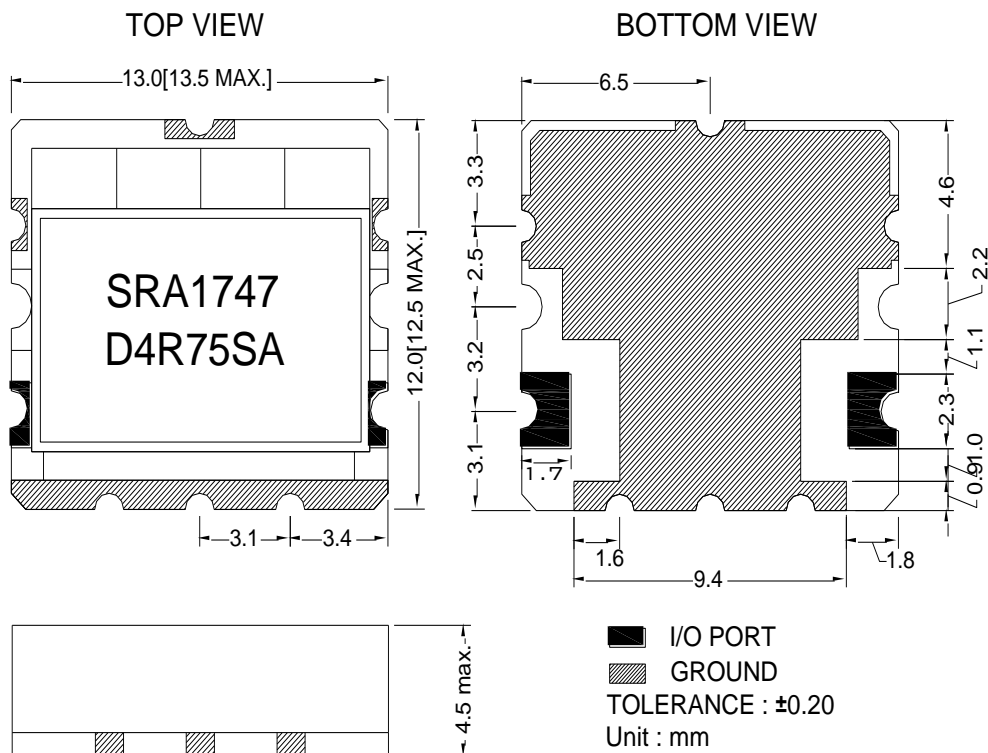

Plot Data

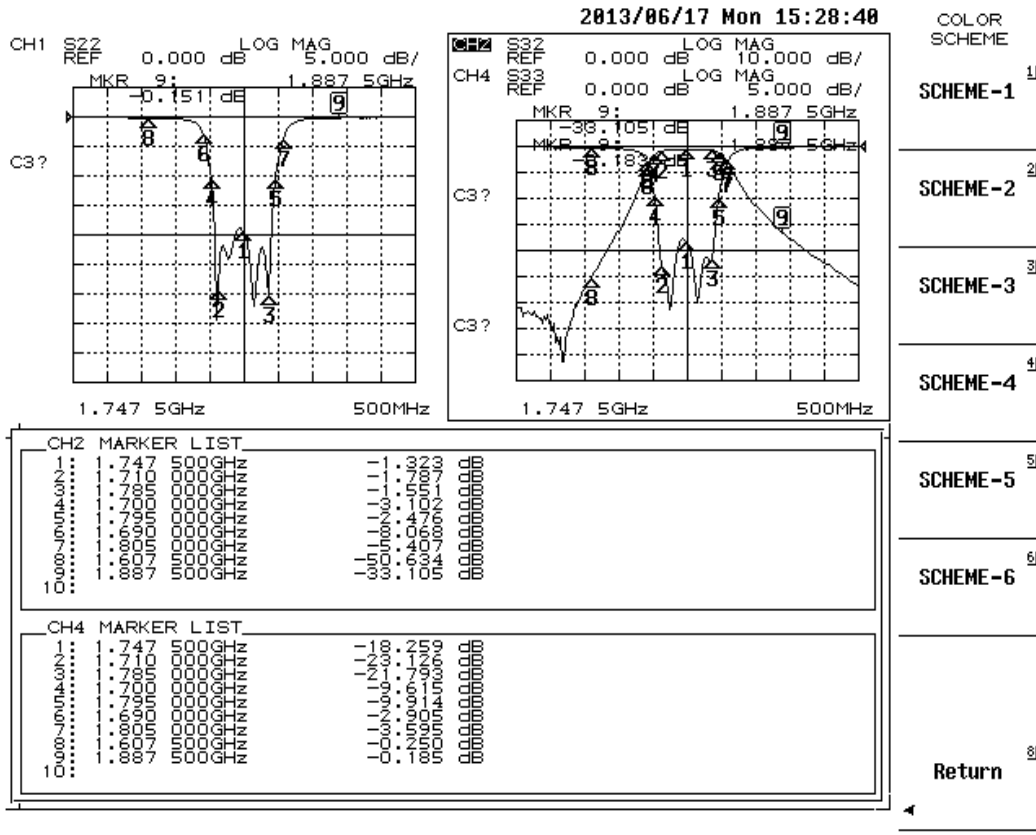

Recommended PC Board Pattern

