



Electrical Specification

Items	Spec	Unit
Center Frequency [fo]	1950.0	MHz
Bandwidth [BW]	$f_o \pm 30.0$ [1920.0 ~ 1980.0]	MHz
Insertion Loss in BW	1.8	dB max.
Ripple in BW	0.7	dB max.
Return Loss in BW		dB min.
V S W R in BW	1.8	max.
Attenuation <input checked="" type="checkbox"/> Absolute Value <input type="checkbox"/> Relative Value	45.0 dB min. @ $f_o \pm$ [1550.0 & 2350.0]	MHz
	14.0 dB min. @ $f_o \pm$ [1850.0 &]	MHz
	15.0 dB min. @ $f_o \pm$ [2050.0 &]	MHz
	dB min. @ $f_o \pm$ [&]	MHz
Group Delay Variation		ns max
Input Power		W max.
In/Out Impedance	50 Ω	
Operation Temp. Range	-40°C to +85°C	

Mechanical Specification

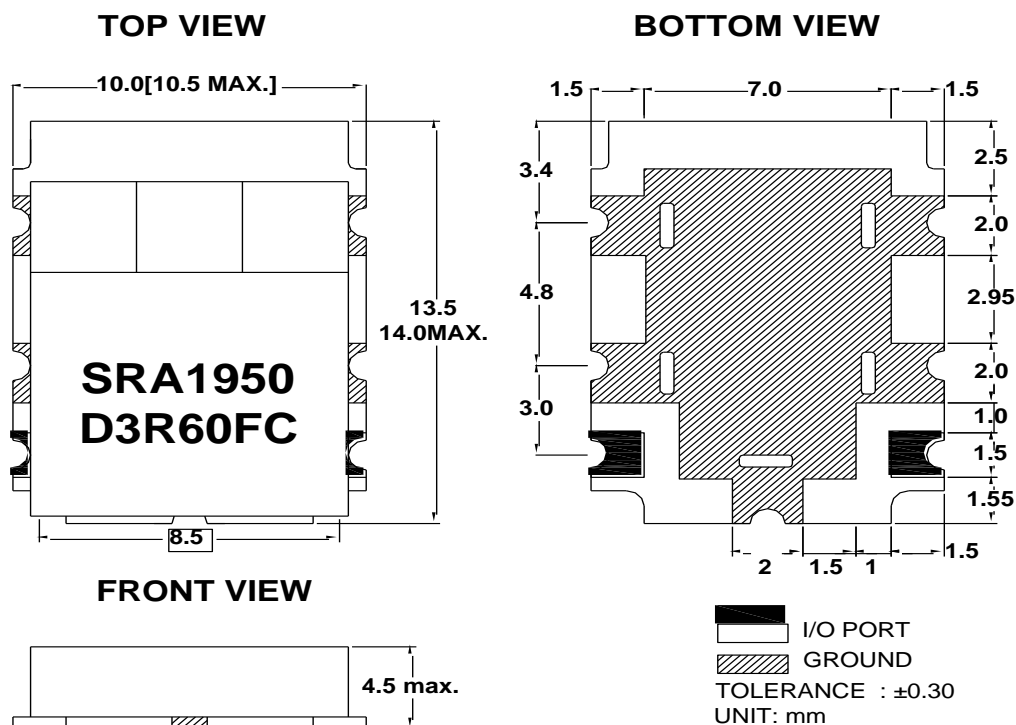

Plot Data

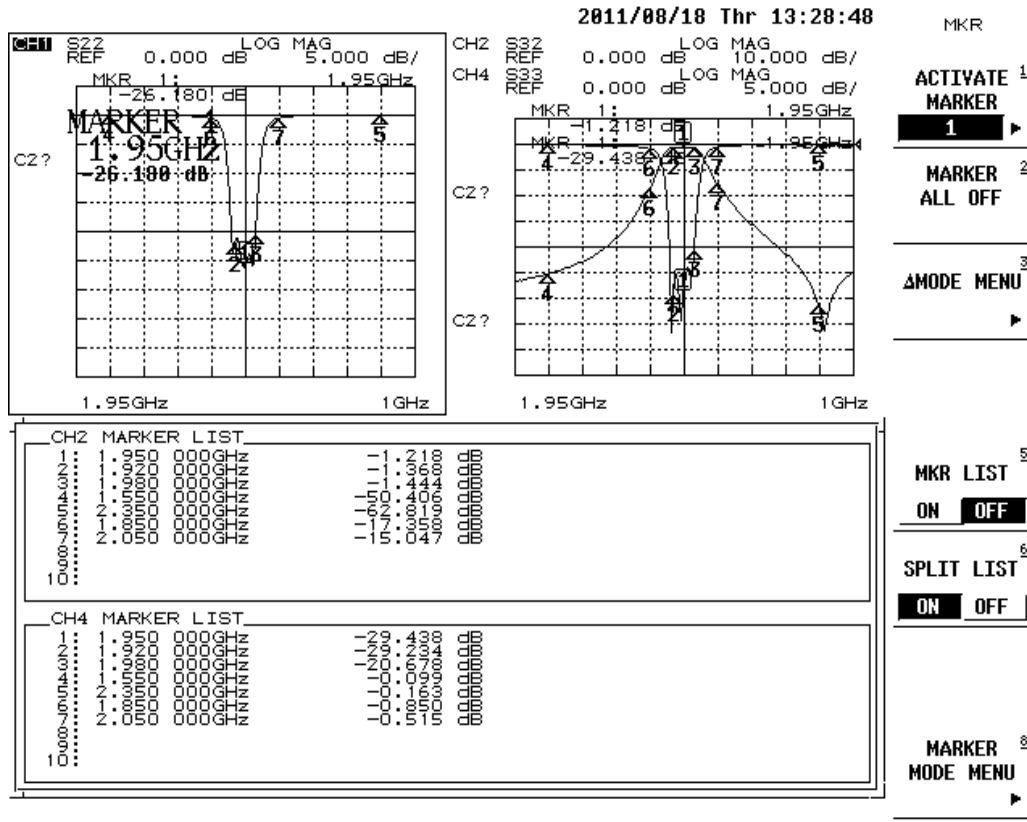

Recommended PC Board Pattern

