



Electrical Specification

Items	Spec	Unit
Center Frequency [fo]	2140.0	MHz
Bandwidth [BW]	$f_o \pm 30.0$ [2110.0 ~ 2170.0]	MHz
Insertion Loss in BW	1.3	dB max.
Ripple in BW	0.6	dB max.
Return Loss in BW		dB min.
V S W R in BW	1.8	max.
Attenuation <input checked="" type="checkbox"/> Absolute Value <input type="checkbox"/> Relative Value	50.0 dB min. @ $f_o \pm$ [1325.0 &]	MHz
	52.0 dB min. @ $f_o \pm$ [1717.5 & 1777.5]	MHz
	48.0 dB min. @ $f_o \pm$ [1385.0 &]	MHz
	dB min. @ $f_o \pm$ [&]	MHz
Group Delay Variation		ns max
Input Power		W max.
In/Out Impedance	50 Ω	
Operation Temp. Range	-40°C to +85°C	

Mechanical Specification

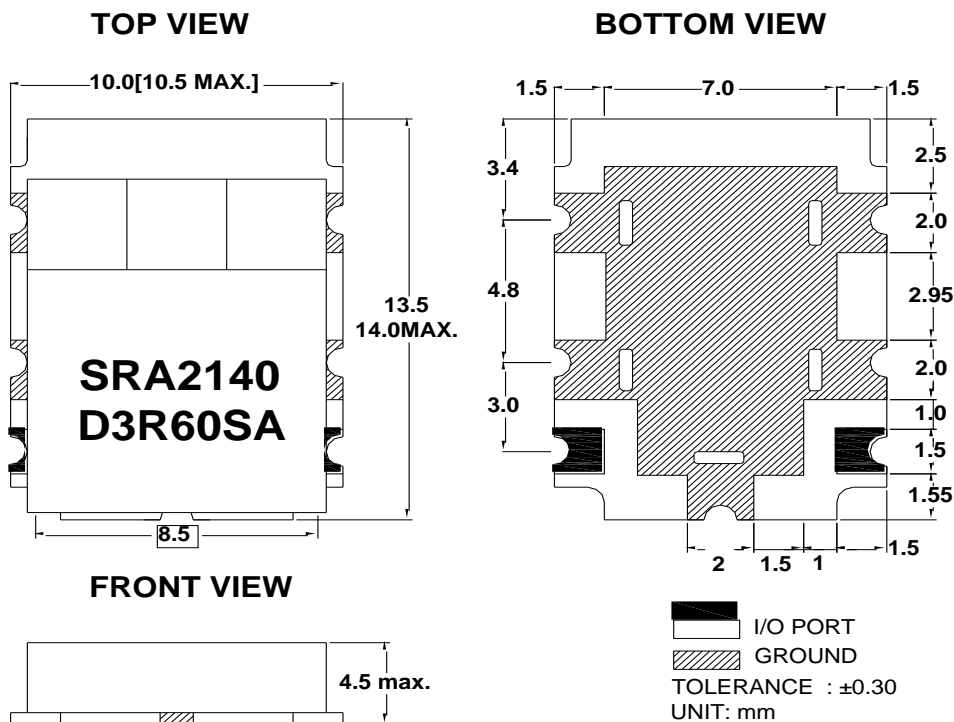

Plot Data

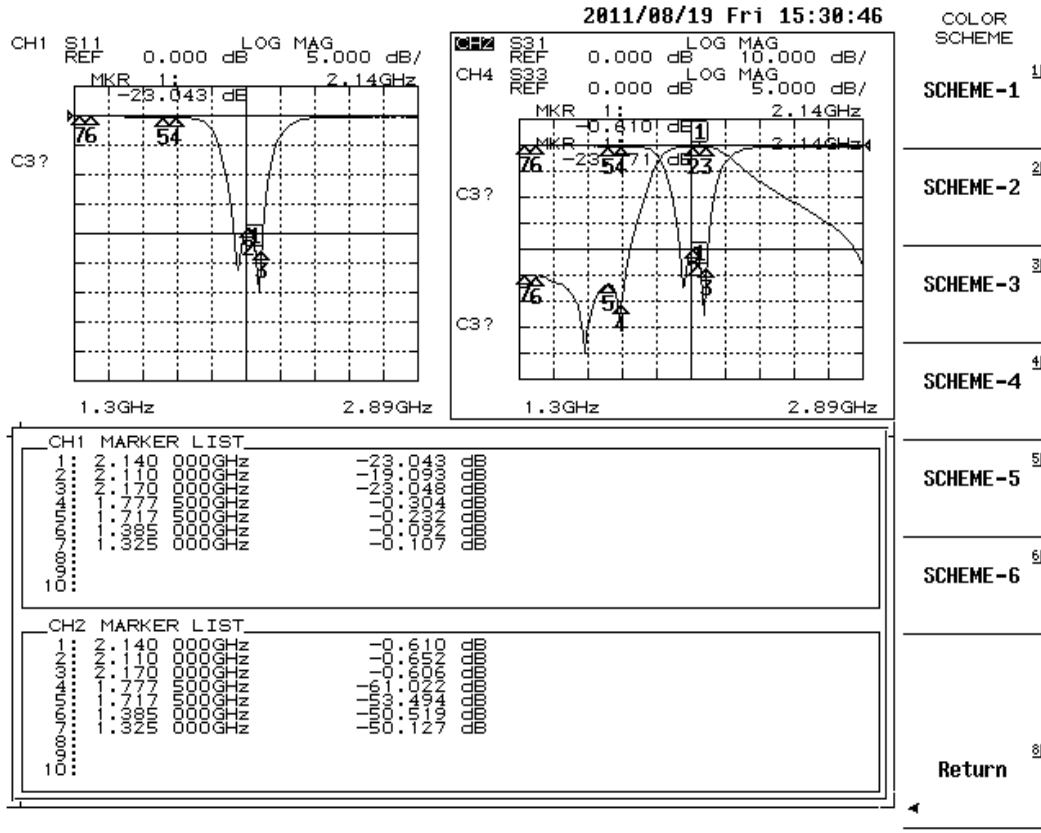

Recommended PC Board Pattern

