



Electrical Specification

Items	Spec	Unit
Center Frequency [fo]	1505.5	MHz
Bandwidth [BW]	$f_o \pm 52.5$ [1453.0 ~ 1558.0]	MHz
Insertion Loss in BW	1.5	dB max.
Ripple in BW	0.5	dB max.
Return Loss in BW		dB min.
V S W R in BW	1.5	max.
Attenuation <input checked="" type="checkbox"/> Absolute Value <input type="checkbox"/> Relative Value	20.0 dB min. @ $f_o \pm$ [1355.5 & 1655.5]	MHz
	40.0 dB min. @ $f_o \pm$ [1205.5 & 1805.5]	MHz
	dB min. @ $f_o \pm$ [&]	MHz
	dB min. @ $f_o \pm$ [&]	MHz
Group Delay Variation		ns max
Input Power		W max.
In/Out Impedance	50 Ω	
Operation Temp. Range	-40°C to +85°C	


Mechanical Specification

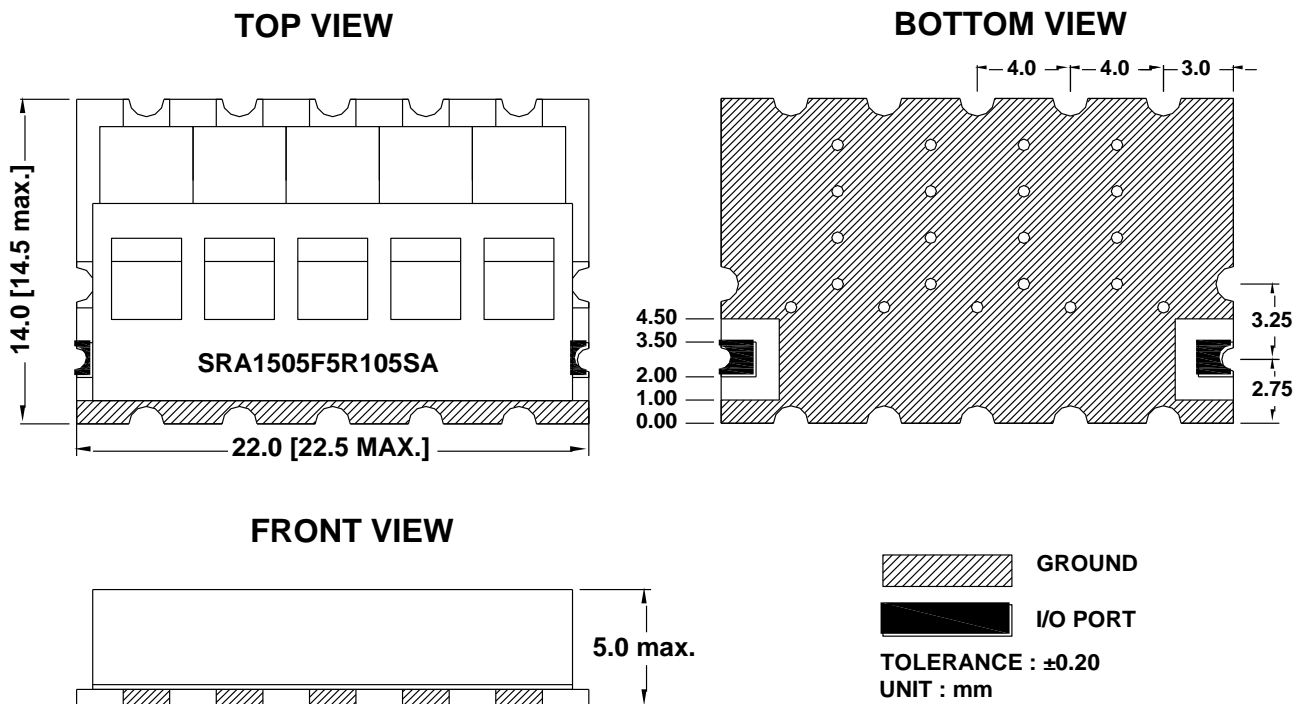

Plot Data

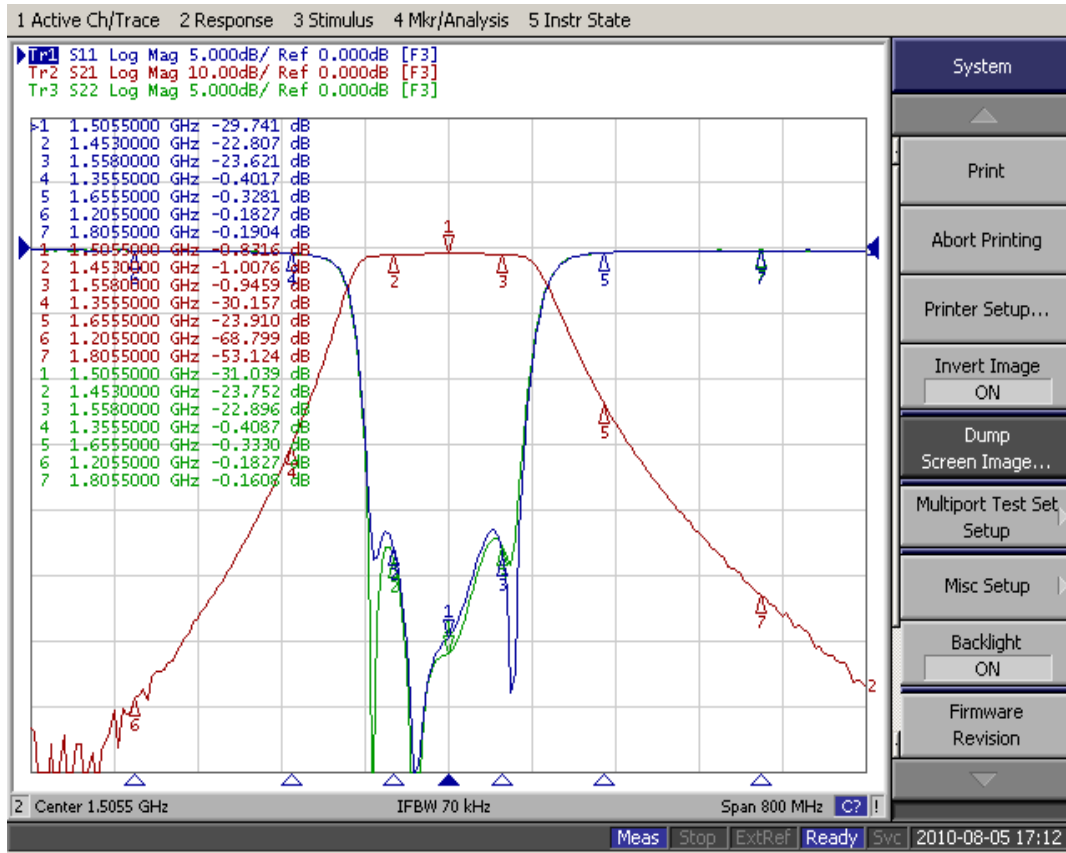

Recommended PC Board Pattern

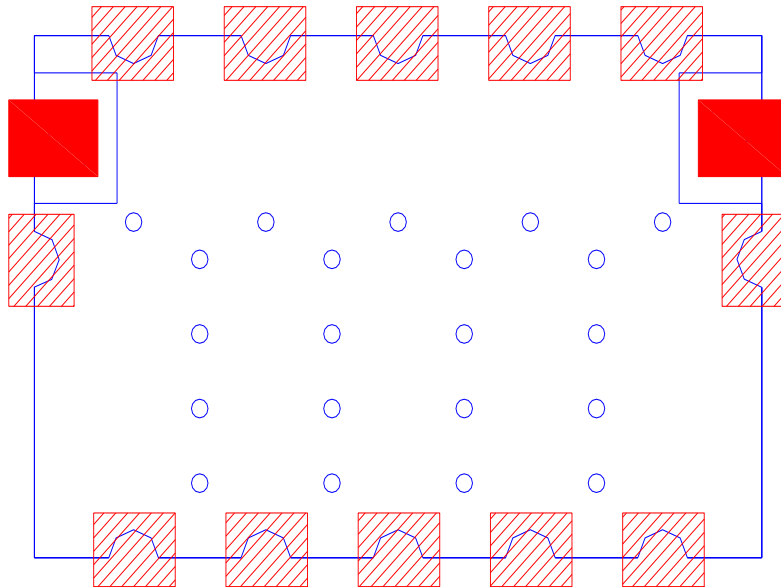

GROUND SOLDERING POINT



I/O PORT SOLDERING POINT