



## Electrical Specification

Items	Spec	Unit
Center Frequency [fo]	1200.0	MHz
Bandwidth [BW]	$fo \pm 100.0$ [ 1100.0 ~ 1300.0 ]	MHz
Insertion Loss in BW	3.0	dB max.
Ripple in BW	1.0	dB max.
Return Loss in BW		dB min.
V S W R in BW	2.0	max.
Attenuation <input checked="" type="checkbox"/> Absolute Value <input type="checkbox"/> Relative Value	10.0 dB min. @ $fo \pm$ [ 1060.0 & 1340.0 ]	MHz
	30.0 dB min. @ $fo \pm$ [ 1030.0 & 1370.0 ]	MHz
	dB min. @ $fo \pm$ [ & ]	MHz
	dB min. @ $fo \pm$ [ & ]	MHz
Group Delay Variation		ns max
Input Power		W max.
In/Out Impedance	50 $\Omega$	
Operation Temp. Range	-40°C to +85°C	

## Mechanical Specification

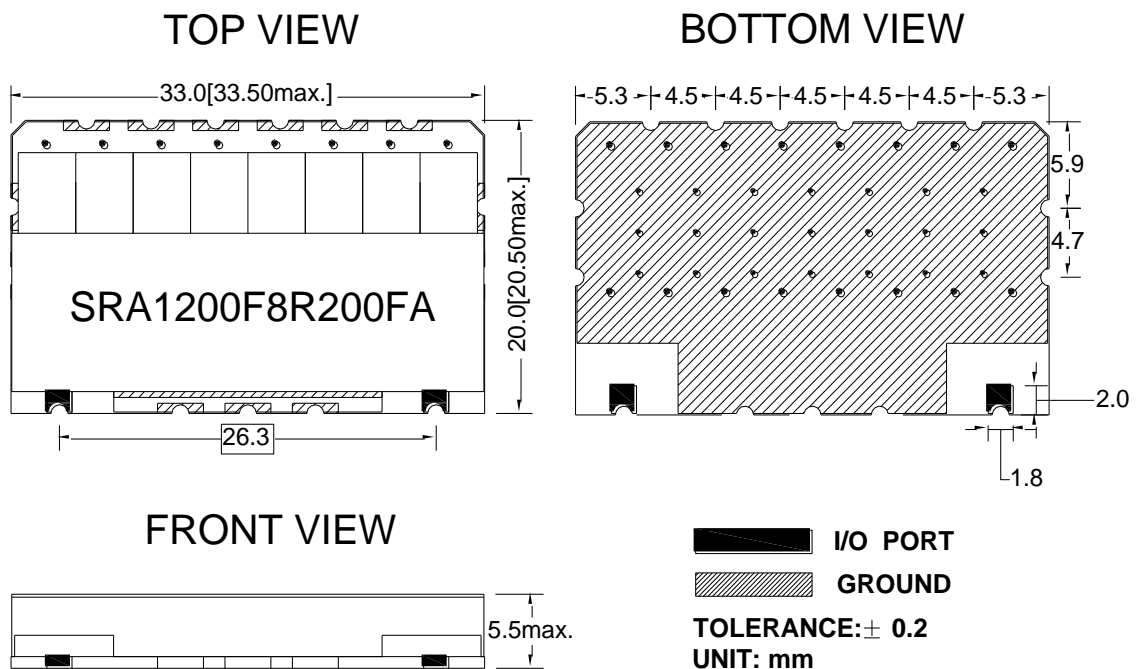

## Plot Data

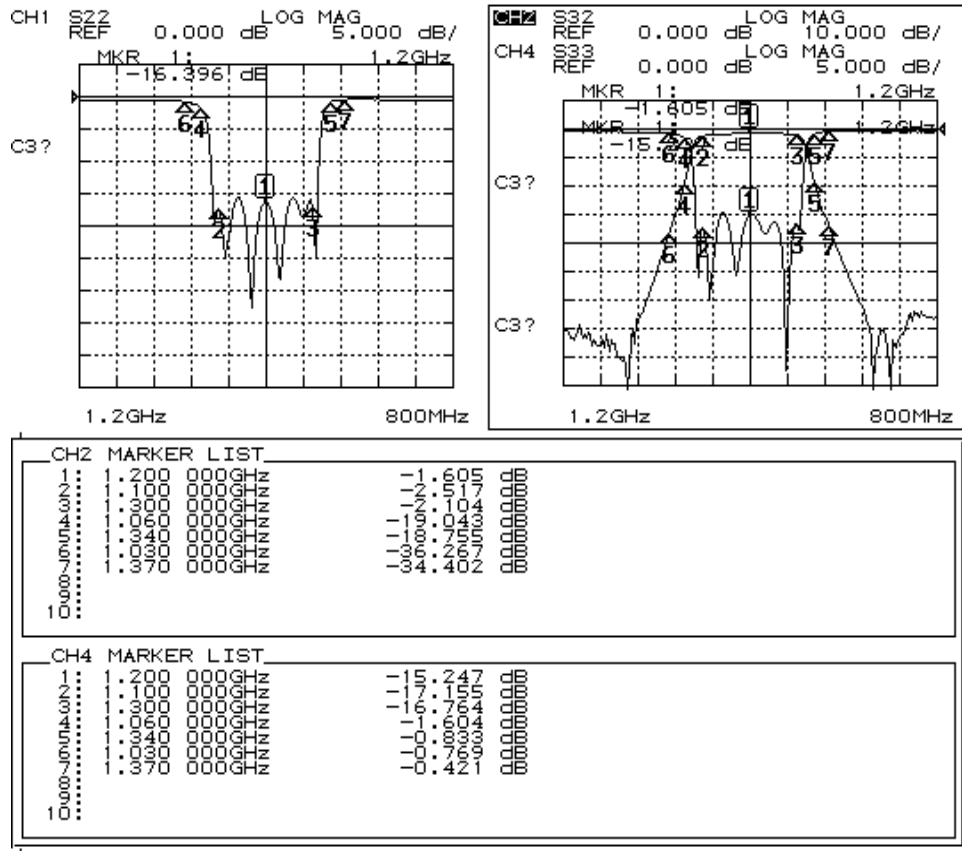

## Recommended PC Board Pattern

