



Electrical Specification

Items	Spec	Unit
Center Frequency [fo]	1100.0	MHz
Bandwidth [BW]	$fo \pm 15.0$ [1085.0 ~ 1115.0]	MHz
Insertion Loss in BW	3.0	dB max.
Ripple in BW	0.5	dB max.
Return Loss in BW	15.0	dB min.
V S W R in BW		max.
Attenuation	50.0 dB min. @ $fo \pm$ [1000.0 ~ 1200.0]	MHz
<input checked="" type="checkbox"/> Absolute Value	50.0 dB min. @ $fo \pm$ [& 1250.0]	MHz
<input type="checkbox"/> Relative Value	50.0 dB min. @ $fo \pm$ [& 2000.0]	MHz
	dB min. @ $fo \pm$ [&]	MHz
Group Delay Variation		ns max
Input Power		W max.
In/Out Impedance	50 Ω	
Operation Temp. Range	-40°C to +85°C	

Mechanical Specification

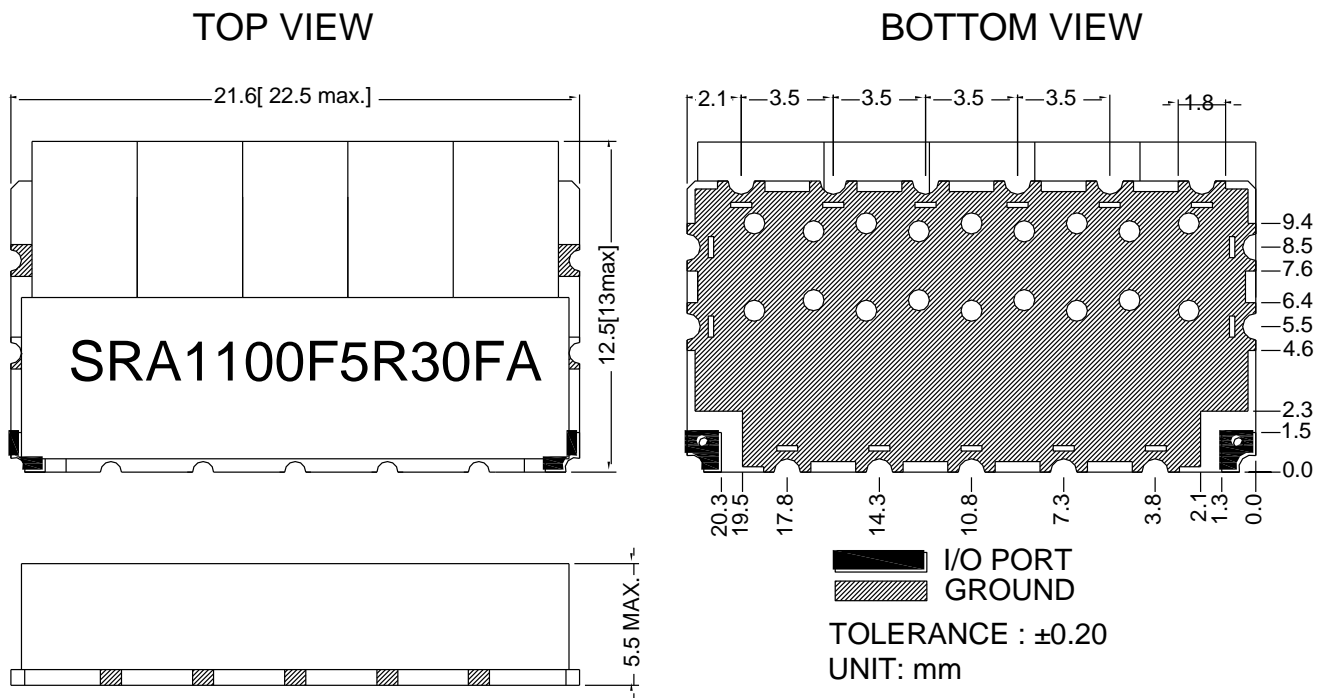

Plot Data

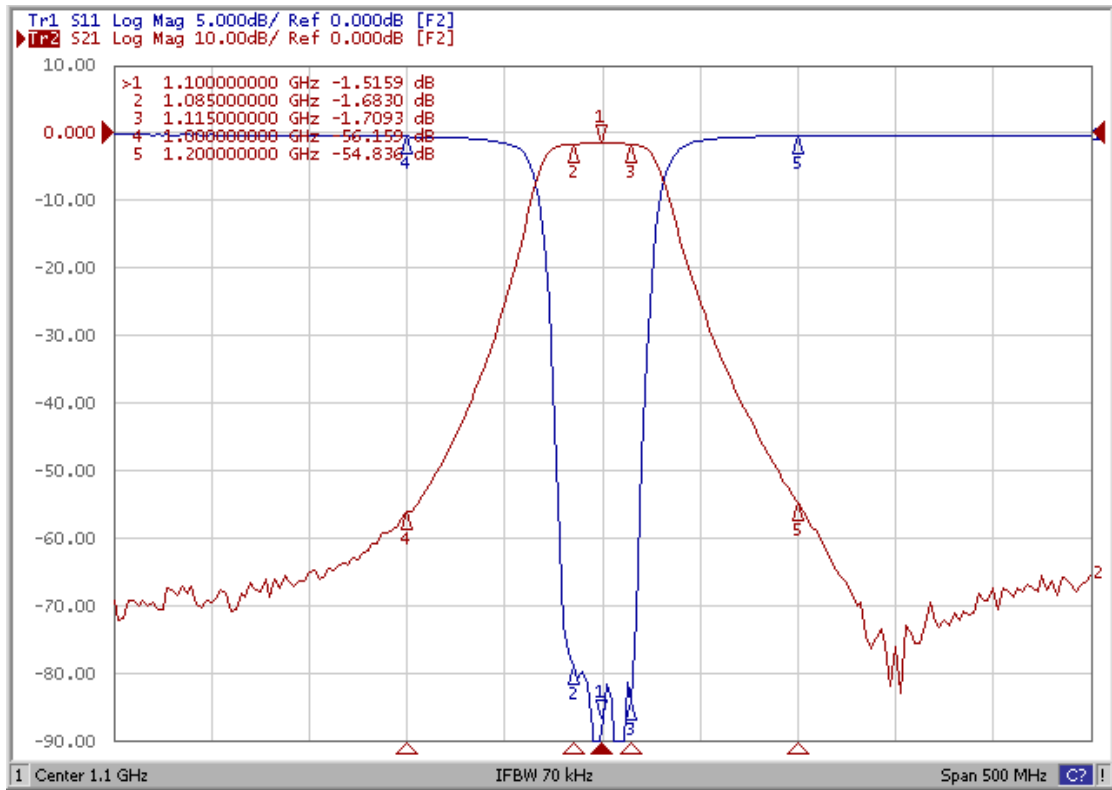

Recommended PC Board Pattern

