



## Electrical Specification

Items	Spec	Unit
Center Frequency [fo]	610.0	MHz
Bandwidth [BW]	$fo \pm 30.0$ [ 580.0 ~ 640.0 ]	MHz
Insertion Loss in BW	6.5	dB max.
Ripple in BW	3.0	dB max.
Return Loss in BW		dB min.
V S W R in BW	1.5	max.
Attenuation	60.0 dB min. @ $fo \pm$ [ 540.0 & 680.0 ]	MHz
<input checked="" type="checkbox"/> Absolute Value	dB min. @ $fo \pm$ [ & ]	MHz
<input type="checkbox"/> Relative Value	dB min. @ $fo \pm$ [ & ]	MHz
	dB min. @ $fo \pm$ [ & ]	MHz
Group Delay Variation		ns max
Input Power		W max.
In/Out Impedance	50 $\Omega$	
Operation Temp. Range	-40°C to +85°C	

## Mechanical Specification

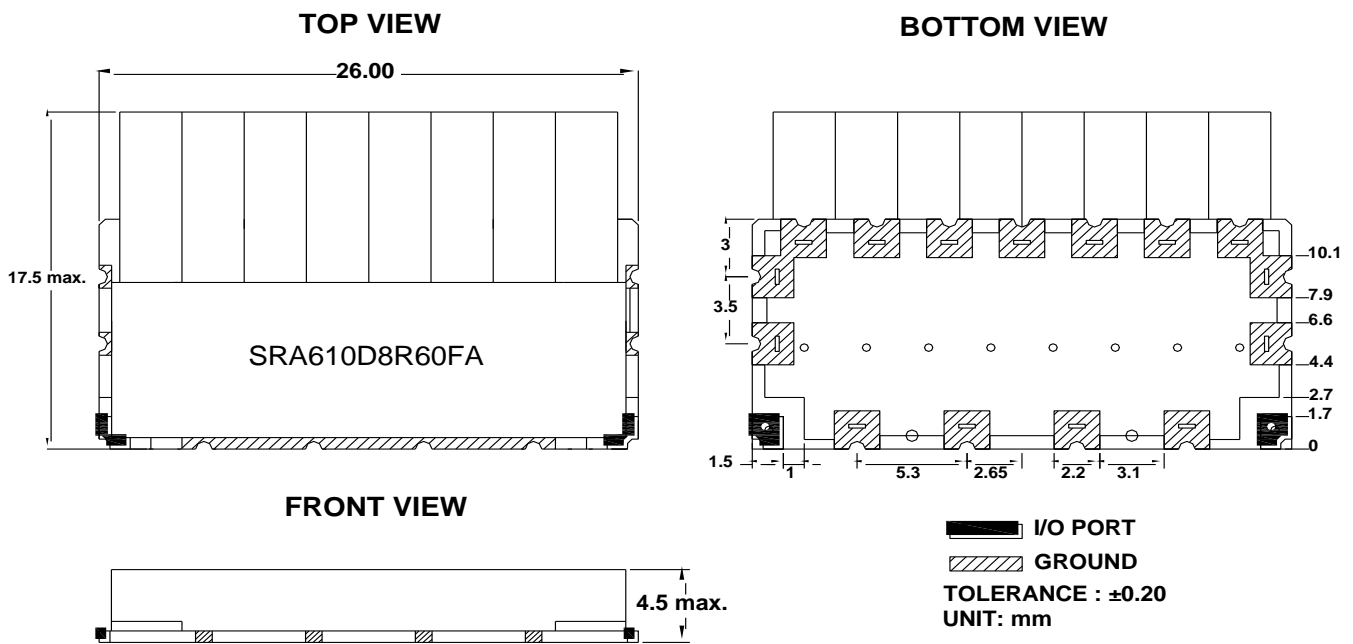

## Plot Data

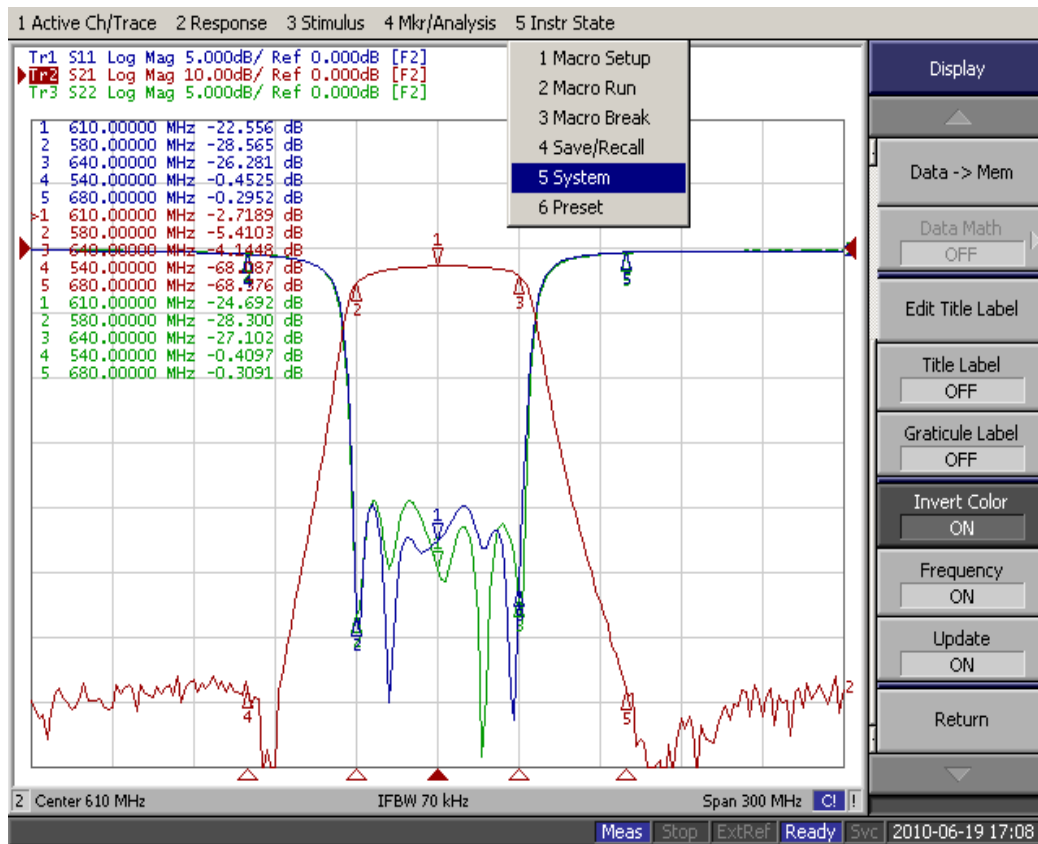

## Recommended PC Board Pattern

