



## Electrical Specification

ITEMS	ANT >> Low		ANT >> High		Unit
Center Frequency [fo]	900.0		945.0		MHz
Bandwidth [BW]	fo± 15.0 [ 885.0 ~ 915.0 ]		fo± 15.0 [ 930.0 ~ 960.0 ]		MHz
Insertion Loss in BW	2.2		2.2		dB max.
Ripple in BW	1.2		1.2		dB max.
Return Loss in BW <input checked="" type="checkbox"/> ANT Port	20.0 S11,S22,S33		20.0 S11,S22,S33		dB min.
V S W R in BW <input type="checkbox"/> ALL Port					max.
Attenuation	47.0 dB min @ [ 930.0 ~ 960.0 ]		47.0 dB min @ [ 885.0 ~ 915.0 ]		MHz
<input checked="" type="checkbox"/> Absolute Value	dB min @ [ ~ ]		dB min @ [ ~ ]		MHz
<input type="checkbox"/> Relative Value	dB min @ [ ~ ]		dB min @ [ ~ ]		MHz
	dB min @ [ ~ ]		dB min @ [ ~ ]		MHz
Isolations	dB min @ [ ~ ]		dB min @ [ ~ ]		MHz
	dB min @ [ ~ ]		dB min @ [ ~ ]		MHz
Input Power	3.0 W max.				
In/Out Impedance	50 Ω				
Operation Temp. Range	-40°C to +85°C				

## Mechanical Specification

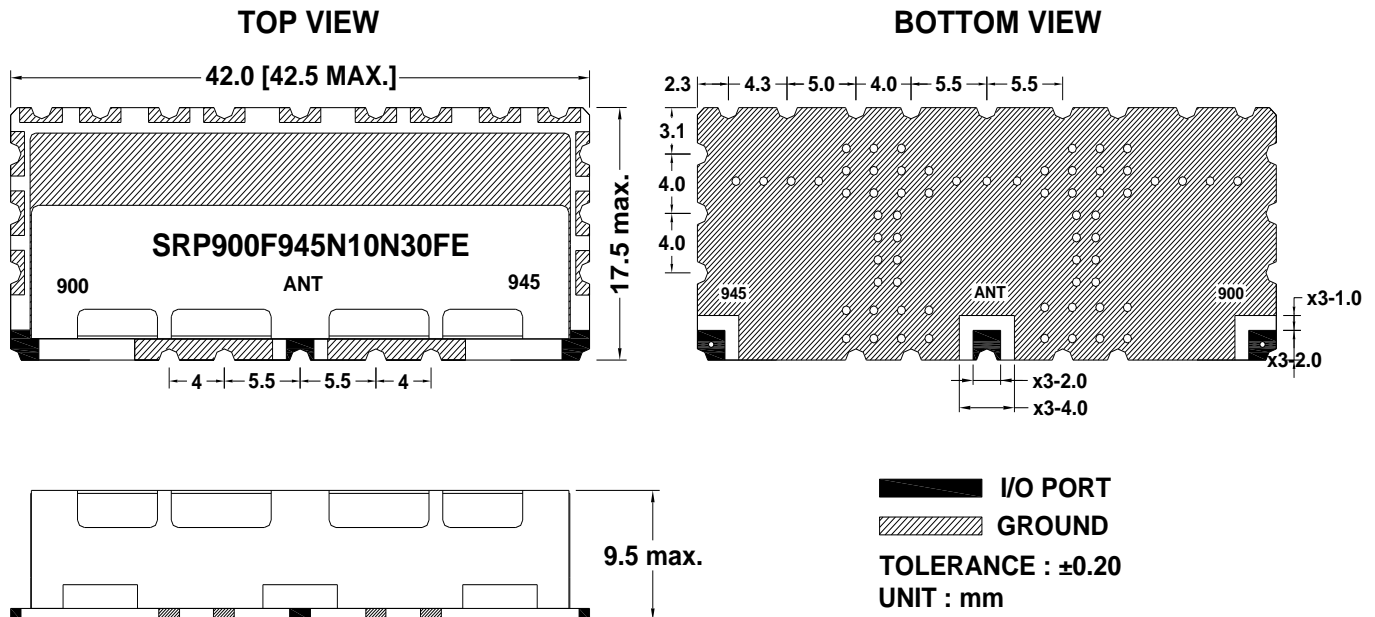

## Plot Data

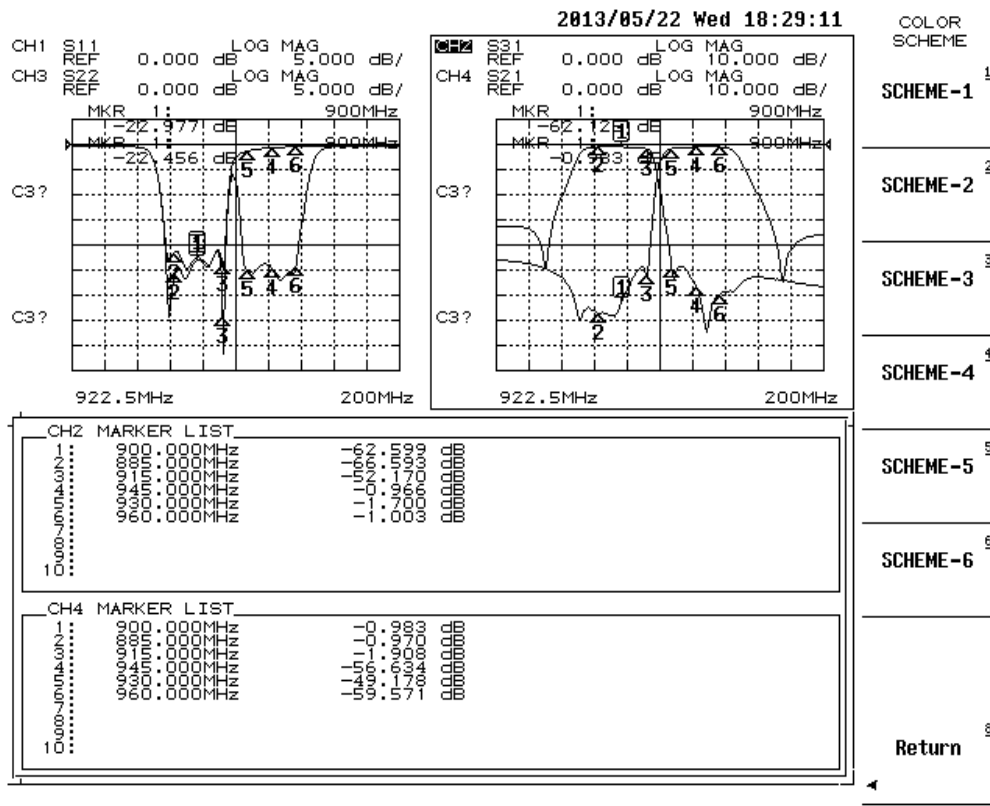

## Recommended PC Board Pattern

