


Electrical Specification

ITEMS	ANT >> Low	ANT >> High	Unit
Center Frequency [fo]	912.0	957.0	MHz
Bandwidth [BW]	fo±3.0 [909.0 ~ 915.0]	fo±3.0 [954.0 ~ 960.0]	MHz
Insertion Loss in BW	3.0	3.0	dB max.
Ripple in BW	1.5	1.5	dB max.
Return Loss in BW <input checked="" type="checkbox"/> ANT Port	18.0	18.0	dB min.
V S W R in BW <input type="checkbox"/> ALL Port			max.
Attenuation	50.0 dB min @ [954.0 ~ 960.0]	50.0 dB min @ [909.0 ~ 915.0]	MHz
<input checked="" type="checkbox"/> Absolute Value	20.0 dB min @ [934.5 ~]	20.0 dB min @ [934.5 ~]	MHz
<input type="checkbox"/> Relative Value	dB min @ [~]	dB min @ [~]	MHz
	dB min @ [~]	dB min @ [~]	MHz
Isolations	60.0 dB min @ [909.0 ~ 915.0]		MHz
	60.0 dB min @ [954.0 ~ 960.0]		MHz
Input Power	3.0 W max.		
In/Out Impedance	50 Ω		
Operation Temp. Range	-40°C to +85°C		

Mechanical Specification

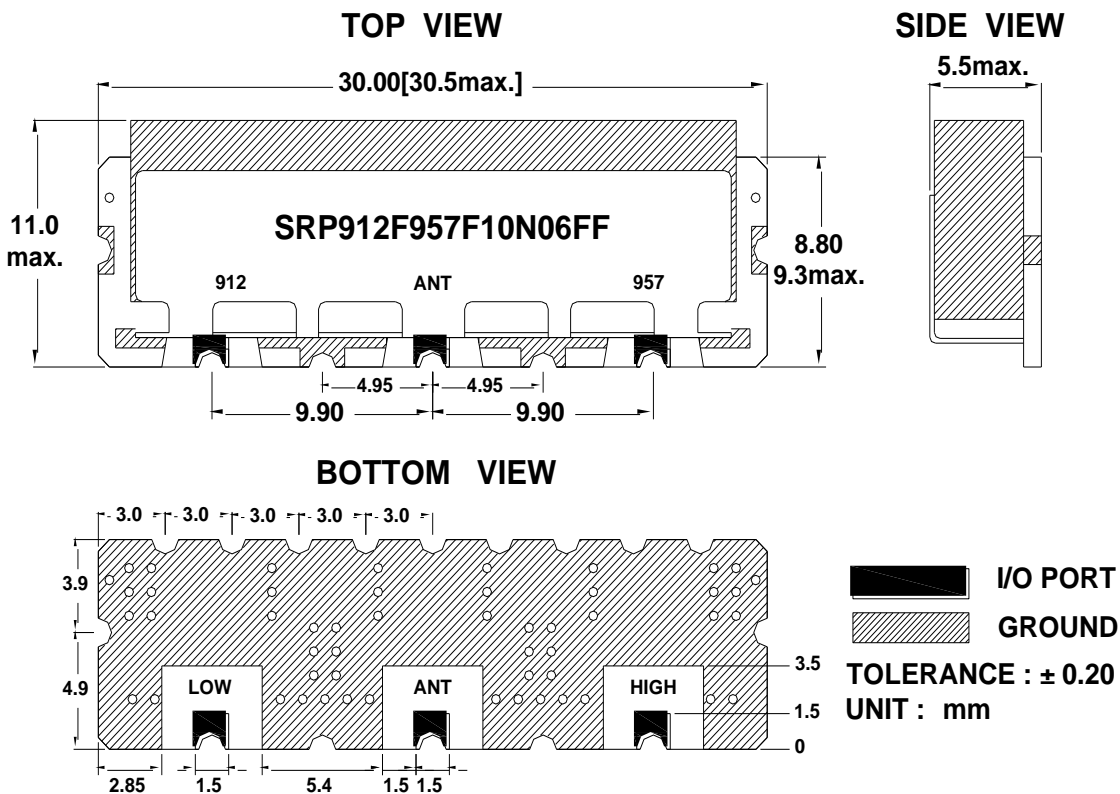

Plot Data

