


Electrical Specification

Items	CH 1	CH2	CH 3	CH 4	CH 5	Unit
Center Frequency [fo]	707.0	742.5	781.5	836.5	881.5	MHz
Bandwidth [BW]	698.0 ~ 716.0	728.0 ~ 757.0	776.0 ~ 787.0	824.0 ~ 849.0	869.0 ~ 894.0	MHz
Insertion Loss in BW	6.0	6.0	6.0	4.0	4.0	dB max.
Ripple in BW	1.5	1.5	1.5	1.5	1.5	dB max.
Return Loss in BW	15.0	13.0	15.0	15.0	15.0	dB min.
Attenuation	50 @ 728.0 ~ 757.0	50 @ 698.0 ~ 716.0	48 @ 698.0 ~ 716.0	50 @ 698.0 ~ 716.0	50 @ 698.0 ~ 716.0	MHz
<input checked="" type="checkbox"/> Absolute Value dB	50 @ 776.0 ~ 787.0	55 @ 776.0 ~ 787.0	55 @ 728.0 ~ 757.0	50 @ 728.0 ~ 757.0	50 @ 728.0 ~ 757.0	MHz
<input type="checkbox"/> Relative Value dBc	50 @ 824.0 ~ 849.0	50 @ 824.0 ~ 849.0	45 @ 824.0 ~ 849.0	50 @ 776.0 ~ 787.0	50 @ 776.0 ~ 787.0	MHz
	50 @ 869.0 ~ 894.0	50 @ 869.0 ~ 894.0	50 @ 869.0 ~ 894.0	65 @ 869.0 ~ 894.0	60 @ 824.0 ~ 849.0	MHz
	14 @ 722.0 ~	12 @ 722.0 ~	18 @ 766.5 ~	20 @ 859.0 ~	20 @ 859.0 ~	MHz
	10 @ 688.0 ~	18 @ 766.5 ~	@ ~	@ ~	10 @ 904.0 ~	MHz
	50 @ 1710.0 ~ 1755.0	50 @ 1710.0 ~ 1755.0	50 @ 1710.0 ~ 1755.0	45 @ 1710.0 ~ 1755.0	45 @ 1710.0 ~ 1755.0	MHz
	50 @ 1850.0 ~ 1910.0	50 @ 1850.0 ~ 1910.0	50 @ 1850.0 ~ 1910.0	40 @ 1850.0 ~ 1910.0	40 @ 1850.0 ~ 1910.0	MHz
	50 @ 1930.0 ~ 1990.0	50 @ 1930.0 ~ 1990.0	50 @ 1930.0 ~ 1990.0	35 @ 1930.0 ~ 1990.0	35 @ 1930.0 ~ 1990.0	MHz
	50 @ 2110.0 ~ 2155.0	50 @ 2110.0 ~ 2155.0	50 @ 2110.0 ~ 2155.0	35 @ 2110.0 ~ 2155.0	35 @ 2110.0 ~ 2155.0	MHz
	50 @ 2496.0 ~ 2696.0	50 @ 2496.0 ~ 2696.0	50 @ 2496.0 ~ 2696.0	50 @ 2496.0 ~ 2696.0	50 @ 2496.0 ~ 2696.0	MHz
Input Power	3.0 W max.					
In/Out Impedance	50 Ω					
Operation Temp. Range	-40°C to +85°C					

Mechanical Specification

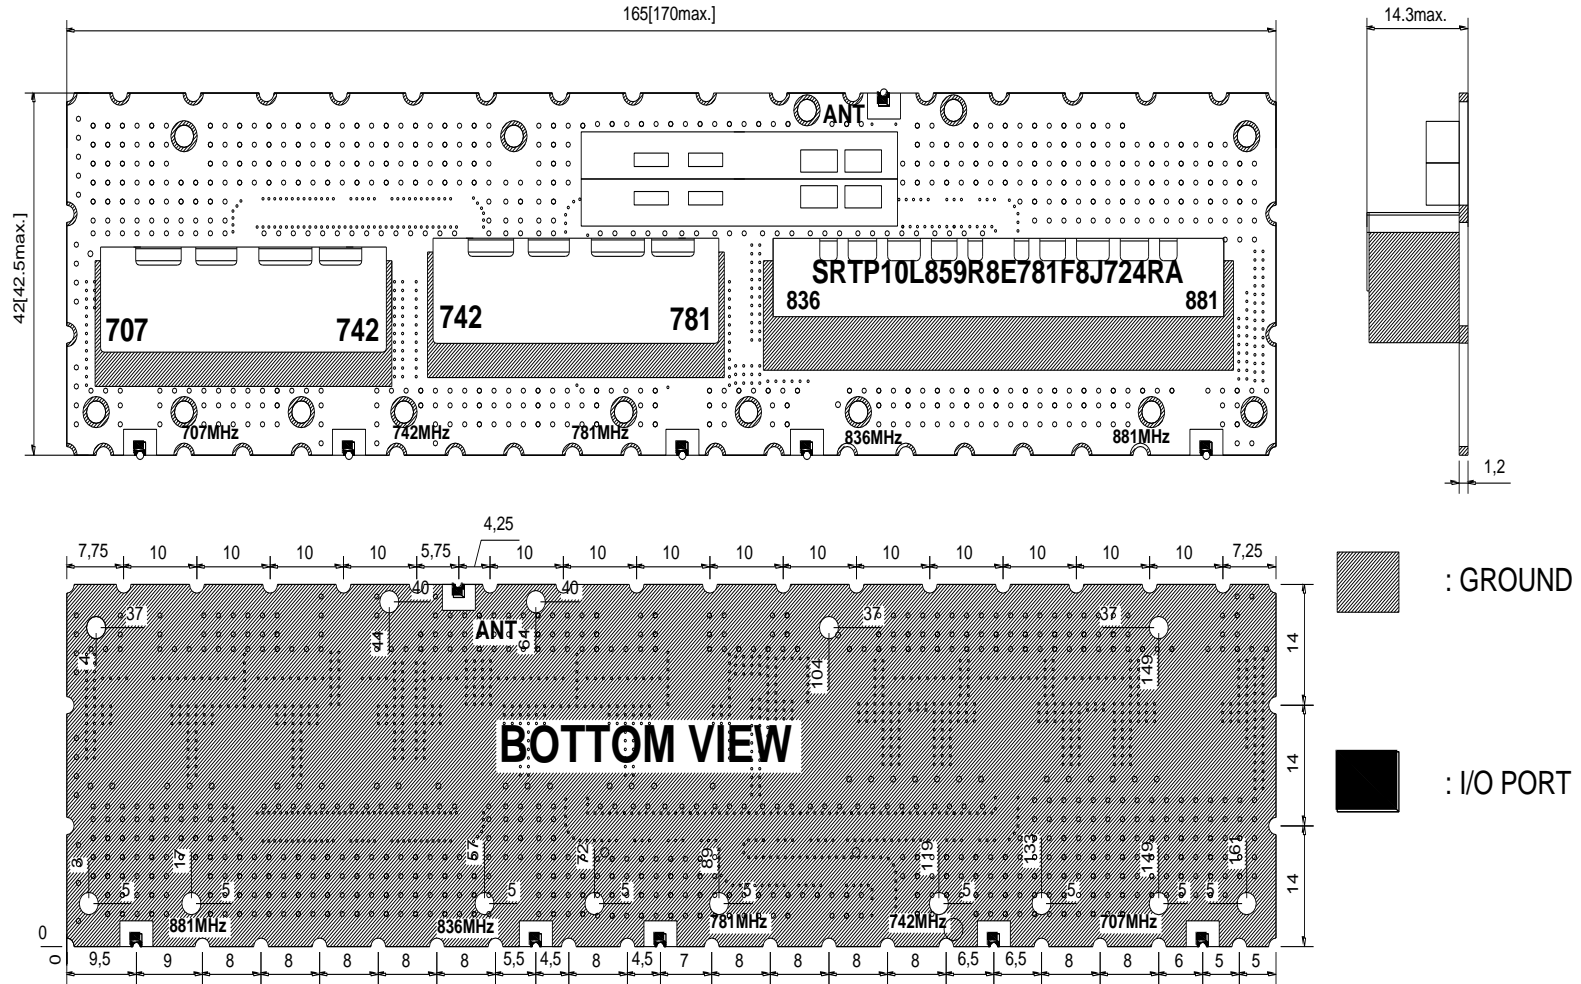

Plot Data

