


Electrical Specification

ITEMS	ANT >> Low	ANT >> High	Unit
Center Frequency [fo]	139.5	233.5	MHz
Bandwidth [BW]	$f_{o\pm 1.5}$ [138.0 ~ 141.0]	$f_{o\pm 1.5}$ [232.0 ~ 235.0]	MHz
Insertion Loss in BW	3.0	3.0	dB max.
Ripple in BW	1.0	1.0	dB max.
Return Loss in BW	15.0	15.0	dB min.
V S W R in BW			max.
Attenuation	50.0 dB min @ [232.0 ~ 235.0]	50.0 dB min @ [138.0 ~ 141.0]	MHz
<input checked="" type="checkbox"/> Absolute Value	dB min @ [~]	dB min @ [~]	MHz
<input type="checkbox"/> Relative Value	dB min @ [~]	dB min @ [~]	MHz
Isolations	dB min @ [~]		MHz
		dB min @ [~]	MHz
Input Power	3.0 W max.		
In/Out Impedance	50 Ω		
Operation Temp. Range	-40°C to +85°C		

Mechanical Specification

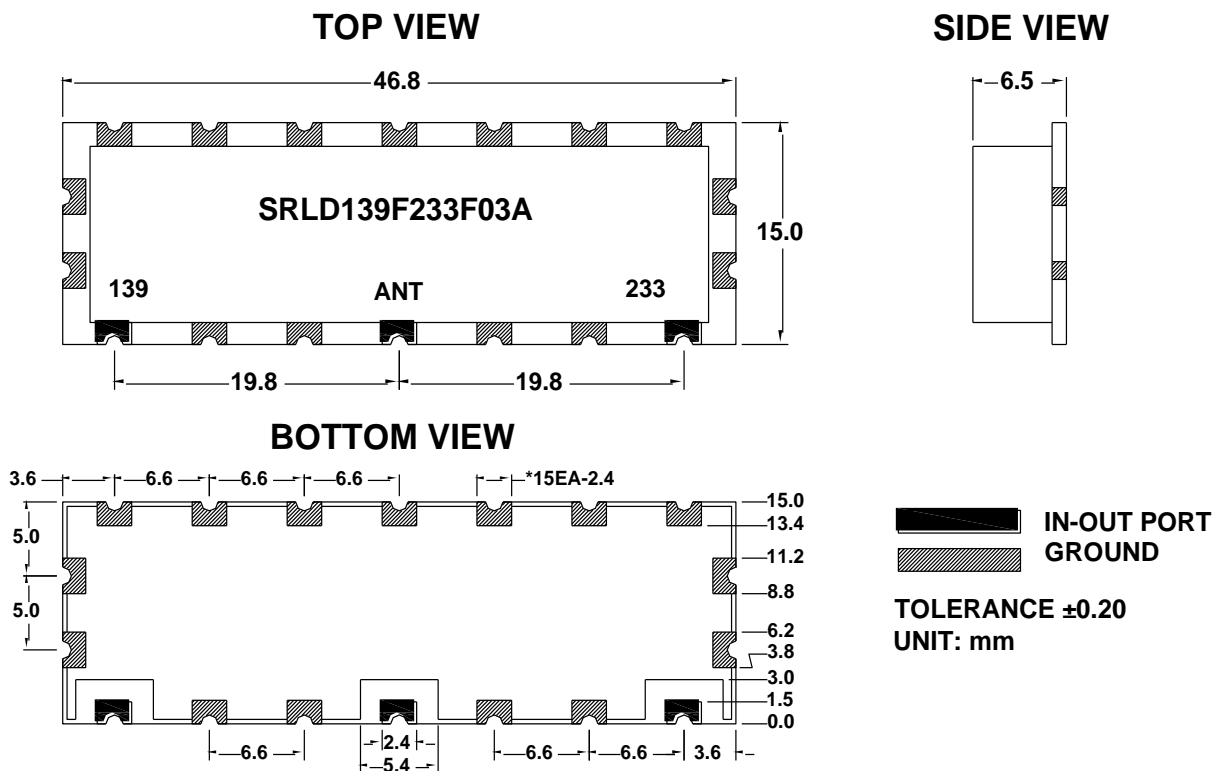

+ Plot Data

