


Electrical Specification

ITEMS	ANT >> Low	ANT >> High	Unit
Center Frequency [fo]	140.0	350.0	MHz
Bandwidth [BW]	fo± 30.0 [110.0 ~ 170.0]	fo± 30.0 [320.0 ~ 380.0]	MHz
Insertion Loss in BW	3.0	3.0	dB max.
Ripple in BW	1.5	1.5	dB max.
Return Loss in BW	15.0	15.0	dB min.
V S W R in BW			max.
Attenuation	40.0 dB min @ [270.0 ~]	40.0 dB min @ [DC ~ 170.0]	MHz
<input checked="" type="checkbox"/> Absolute Value	dB min @ [~]	dB min @ [~]	MHz
<input type="checkbox"/> Relative Value	dB min @ [~]	dB min @ [~]	MHz
Isolations	dB min @ [~]		MHz
	dB min @ [~]		MHz
Input Power	3.0 W max.		
In/Out Impedance	50 Ω		
Operation Temp. Range	-40°C to +85°C		

Mechanical Specification

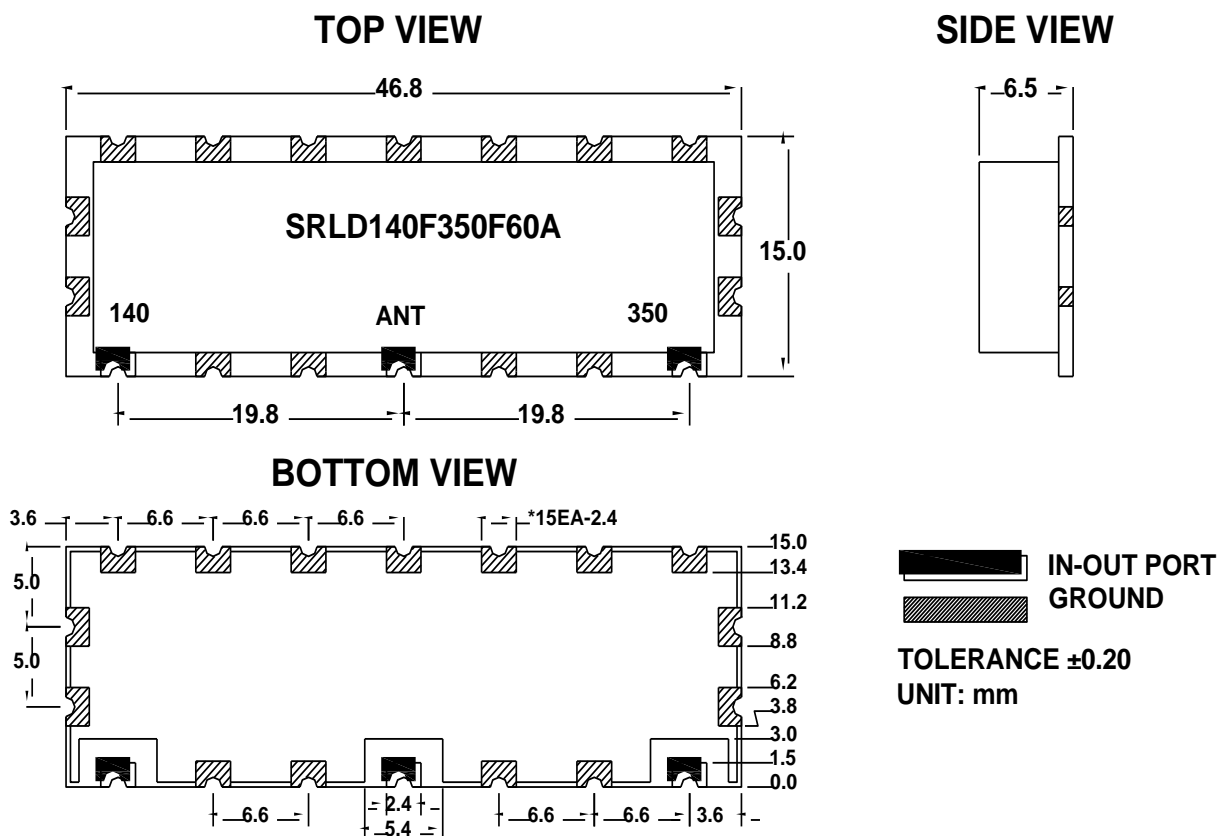

Plot Data

