


Electrical Specification

ITEMS	ANT >> Low	ANT >> High	Unit
Center Frequency [fo]	171.0	221.0	MHz
Bandwidth [BW]	fo± [171.0 ~ 181.0]	fo± 5.0 [216.0 ~ 226.0]	MHz
Insertion Loss in BW	2.0	2.0	dB max.
Ripple in BW	1.0	1.0	dB max.
Return Loss in BW	15.0	15.0	dB min.
V S W R in BW			max.
Attenuation	37.0 dB min @ [216.0 ~ 226.0]	40.0 dB min @ [171.0 ~ 181.0]	MHz
<input checked="" type="checkbox"/> Absolute Value	dB min @ [~]	dB min @ [~]	MHz
<input type="checkbox"/> Relative Value	dB min @ [~]	dB min @ [~]	MHz
Isolations	dB min @ [~]		MHz
	dB min @ [~]		MHz
Input Power	3.0 W max.		
In/Out Impedance	50 Ω		
Operation Temp. Range	-40°C to +85°C		

Mechanical Specification

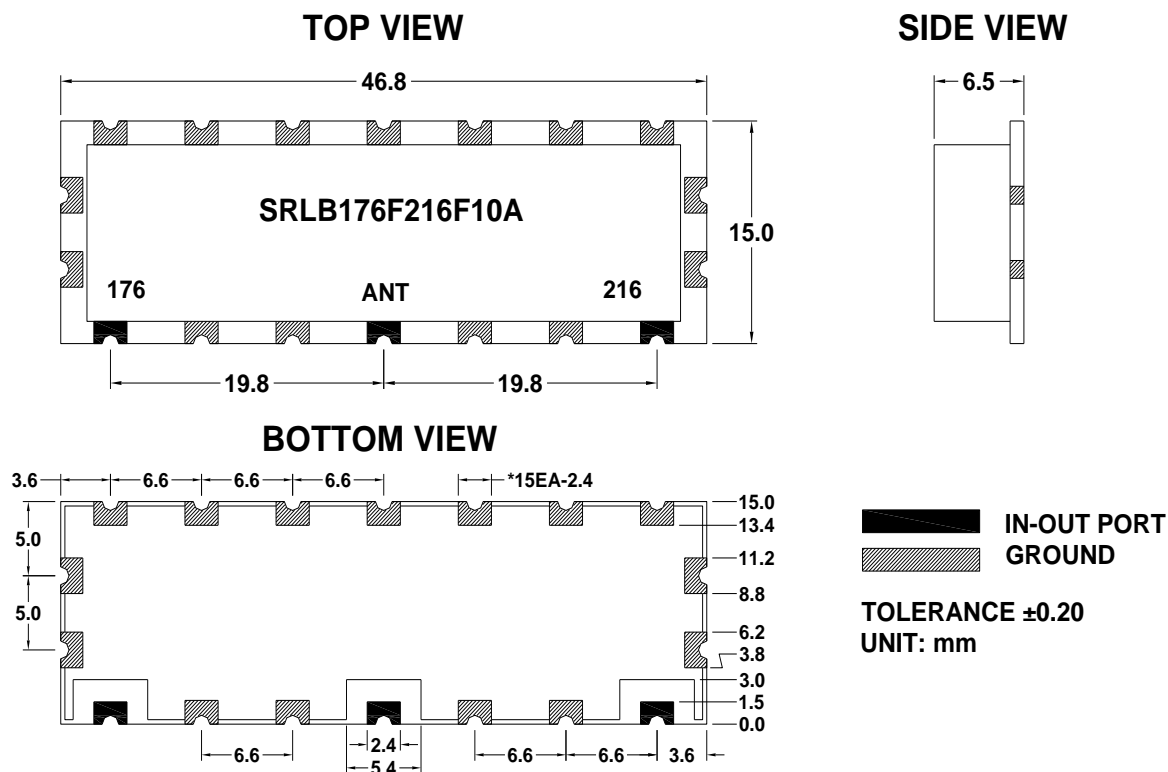

Plot Data

