


Electrical Specification

ITEMS	ANT >> Low	ANT >> High	Unit
Center Frequency [fo]	435.0	900.0	MHz
Bandwidth [BW]	$f_{o\pm 35.0}$ [400.0 ~ 470.0]	$f_{o\pm 100.0}$ [800.0 ~ #####]	MHz
Insertion Loss in BW	1.5	1.8	dB max.
Ripple in BW	1.0	1.0	dB max.
Return Loss in BW			dB min.
V S W R in BW	1.5	1.5	max.
Attenuation	45.0 dB min @ [800.0 ~ #####]	45.0 dB min @ [400.0 ~ 470.0]	MHz
<input checked="" type="checkbox"/> Absolute Value	dB min @ [~]	dB min @ [~]	MHz
<input type="checkbox"/> Relative Value	dB min @ [~]	dB min @ [~]	MHz
Isolations	dB min @ [~]		MHz
		dB min @ [~]	MHz
Input Power	3.0 W max.		
In/Out Impedance	50 Ω		
Operation Temp. Range	-40°C to +85°C		

Mechanical Specification

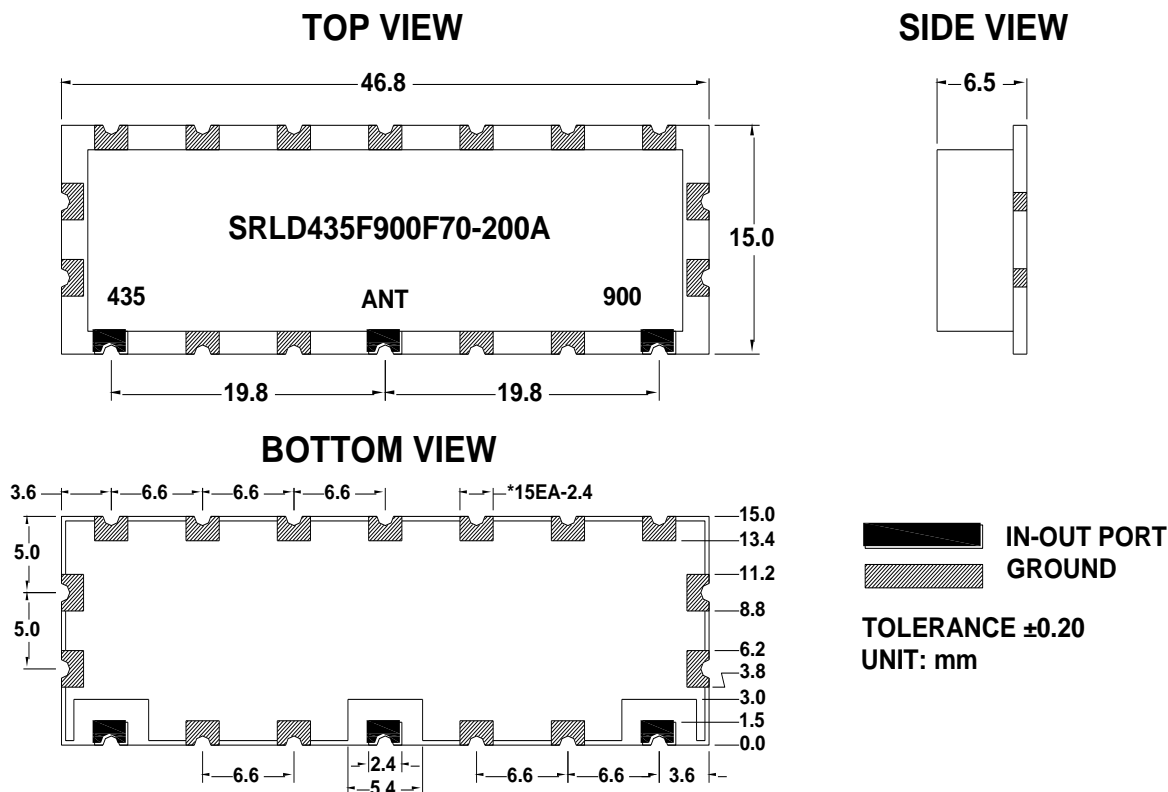

Plot Data

