


Electrical Specification

Items	CH 1	CH 2	CH 3	Unit
Center Frequency [fo]	433.0	300.0	140.0	MHz
Bandwidth [BW]	fo± 2.5 [430.5 ~ 435.5]	fo± 17.5 [282.5 ~ 317.5]	fo± 17.5 [122.5 ~ 157.5]	MHz
Insertion Loss in BW	3.5	2.0	1.2	dB max.
Ripple in BW	1.0	1.0	1.0	dB max.
Return Loss in BW				dB min.
V S W R in BW	1.5	1.5	1.5	max.
Attenuation <input type="checkbox"/> Absolute Value <input checked="" type="checkbox"/> Relative Value	45 dBc min. @ [282.5 ~ 317.5]	45 dBc min. @ [430.5 ~ 435.5]	45 dBc min. @ [430.5 ~ 435.5]	MHz
	45 dBc min. @ [122.5 ~ 157.5]	45 dBc min. @ [122.5 ~ 157.5]	45 dBc min. @ [282.5 ~ 317.5]	MHz
	dBc min. @ [~]	dBc min. @ [~]	dBc min. @ [~]	MHz
	dBc min. @ [~]	dBc min. @ [~]	dBc min. @ [~]	MHz
	dBc min. @ [~]	dBc min. @ [~]	dBc min. @ [~]	MHz
	dBc min. @ [~]	dBc min. @ [~]	dBc min. @ [~]	MHz
	dBc min. @ [~]	dBc min. @ [~]	dBc min. @ [~]	MHz
Coupler			-	
Input Power	3.0 W max.			
In/Out Impedance	50 Ω			
Operation Temp. Range	-40°C to +85°C			

Mechanical Specification

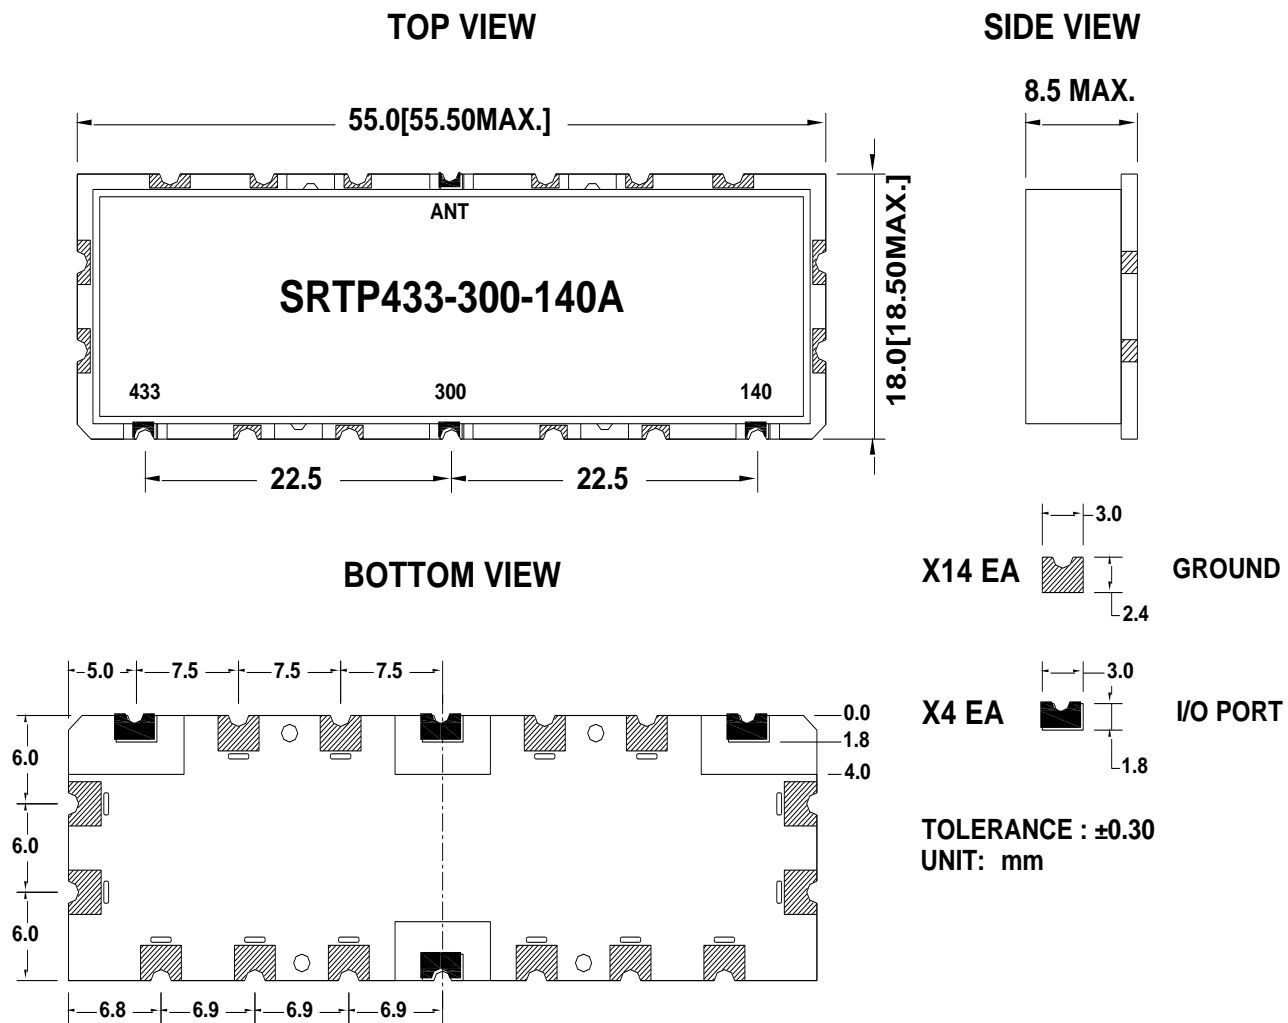

Plot Data

