



## Electrical Specification

Items	Spec	Unit
Center Frequency [fo]	1440.0	MHz
Bandwidth [BW]	$f_o \pm 25.0$ [ 1415.0 ~ 1465.0 ]	MHz
Insertion Loss in BW	3.5	dB max.
Ripple in BW	1.30	dB max.
Return Loss in BW		dB min.
V S W R in BW	1.2	max.
Attenuation <input checked="" type="checkbox"/> Absolute Value <input type="checkbox"/> Relative Value	80.0 dB min. @ $f_o \pm$ [ 1000.0 ~ 1340.0 ]	MHz
	60.0 dB min. @ $f_o \pm$ [ 1340.0 ~ 1365.0 ]	MHz
	60.0 dB min. @ $f_o \pm$ [ 1529.0 ~ 1600.0 ]	MHz
	80.0 dB min. @ $f_o \pm$ [ 1600.0 & ]	MHz
	70.0 dB min. @ $f_o \pm$ [ 2000.0 & ]	MHz
	65.0 dB min. @ $f_o \pm$ [ 2500.0 & ]	MHz
Group Delay Variation	-	ns max
Input Power	3.0	W max.
In/Out Impedance	50 $\Omega$	
Operation Temp. Range	-40°C to +85°C	

## Mechanical Specification

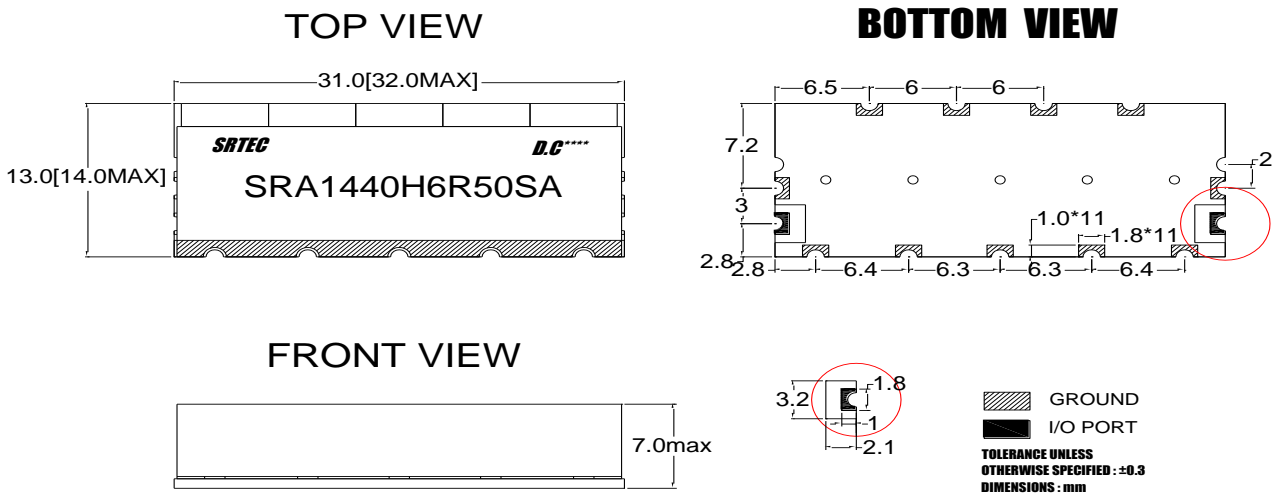

## Plot Data

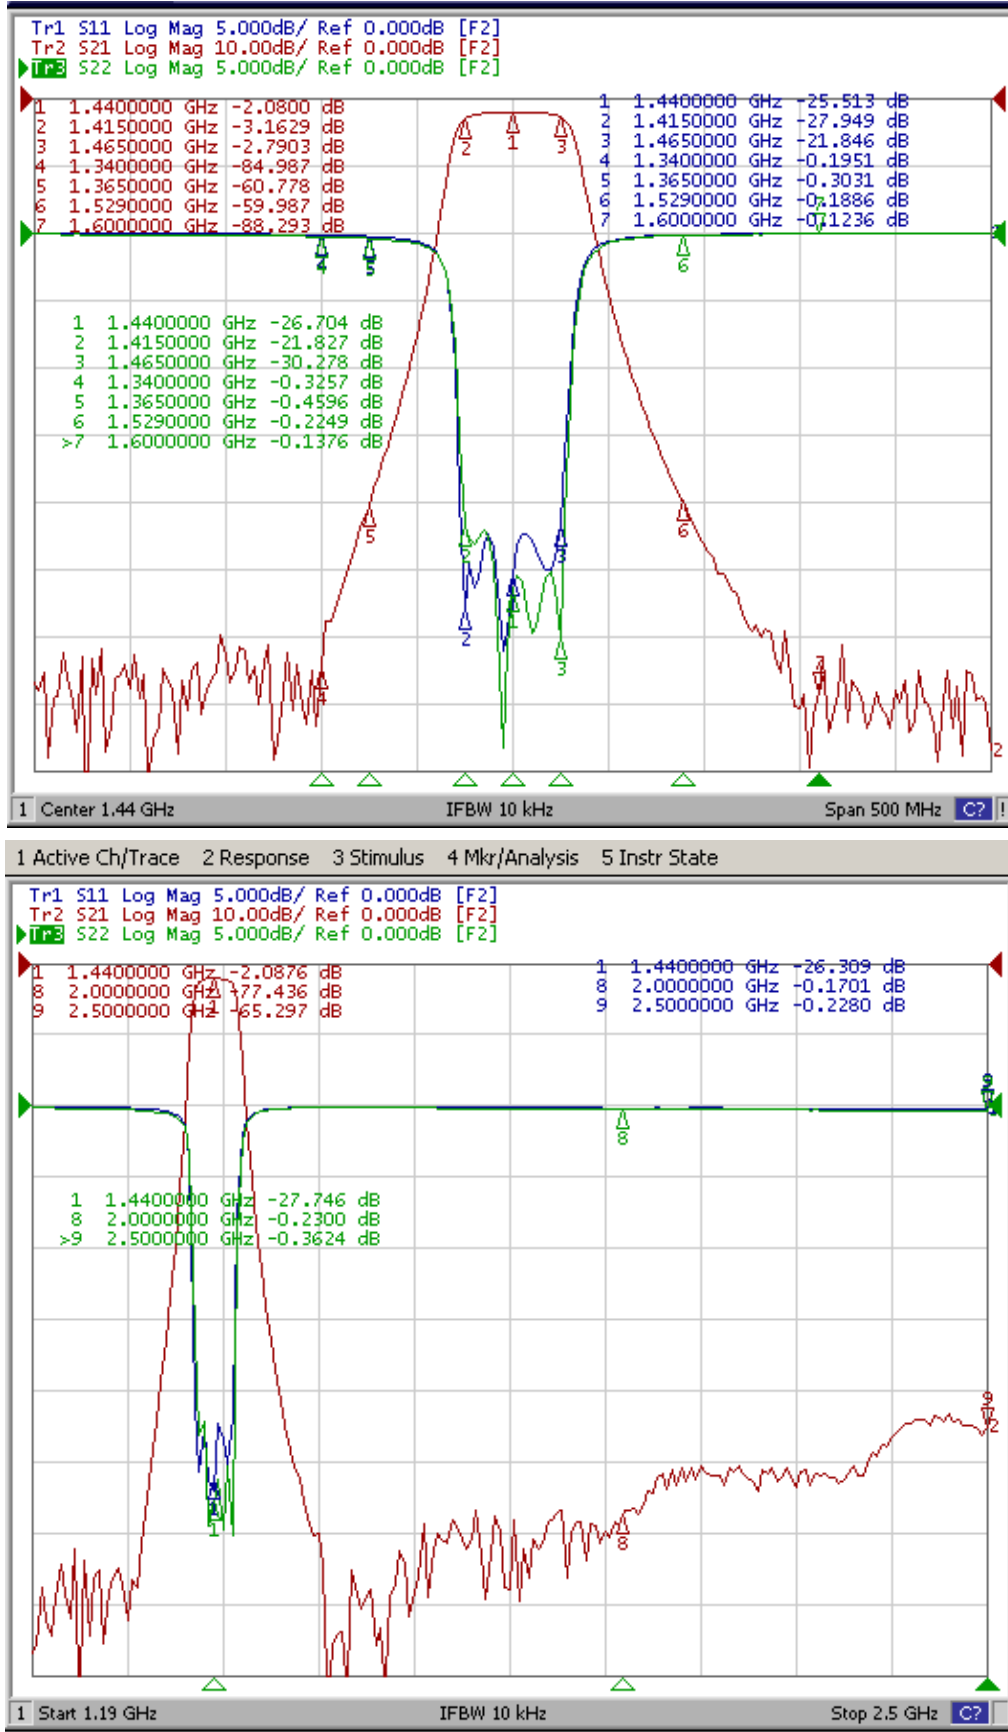

## Plot Data

