



Electrical Specification

Items	Spec	Unit
Center Frequency [fo]	830.0	MHz
Bandwidth [BW]	$f_o \pm 5.0$ [825.0 ~ 835.0]	MHz
Insertion Loss in BW	3.0	dB max.
Ripple in BW	0.5	dB max.
Return Loss in BW		dB min.
V S W R in BW	1.4	max.
Attenuation <input checked="" type="checkbox"/> Absolute Value <input type="checkbox"/> Relative Value	55.0 dB min. @ $f_o \pm$ [715.0 &]	MHz
	30.0 dB min. @ $f_o \pm$ [880.0 &]	MHz
	dB min. @ $f_o \pm$ [&]	MHz
	dB min. @ $f_o \pm$ [&]	MHz
Group Delay Variation		ns max
Input Power		W max.
In/Out Impedance	50 Ω	
Operation Temp. Range	-40°C to +85°C	

Mechanical Specification

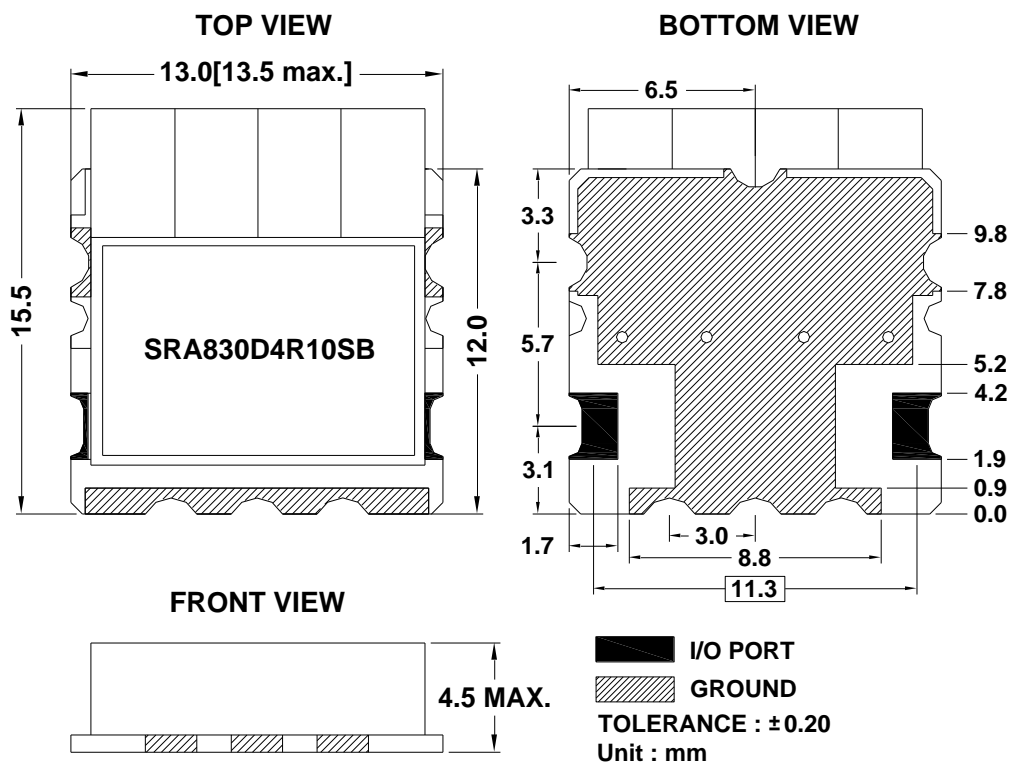

Plot Data

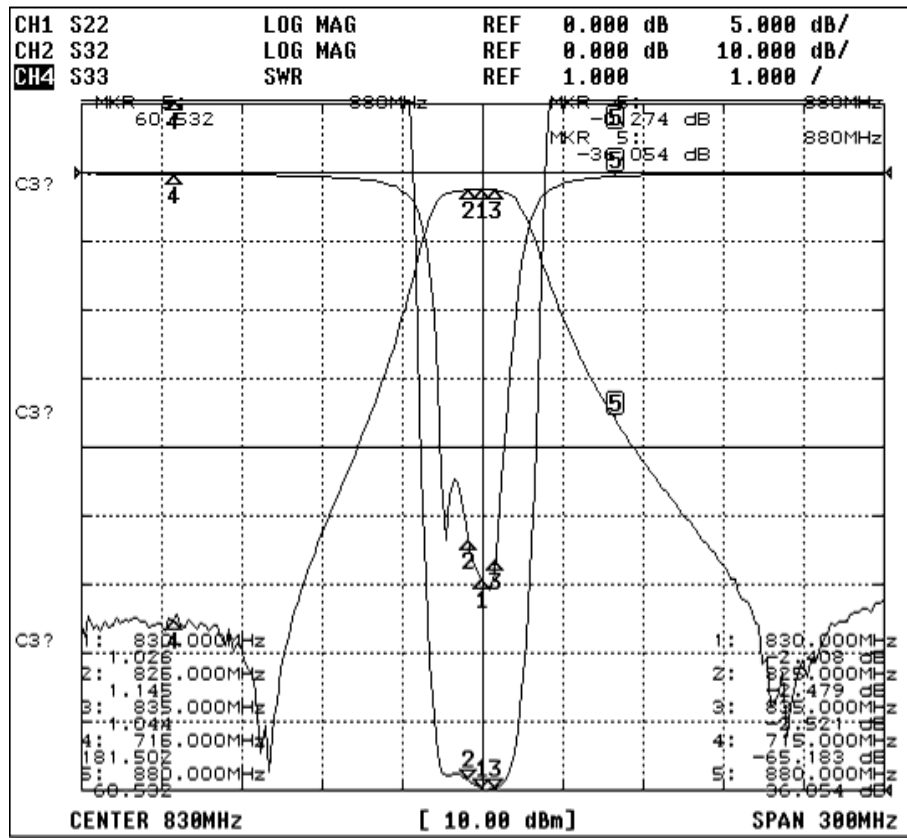

Recommended PC Board Pattern

